






操控箱 Operating Elements

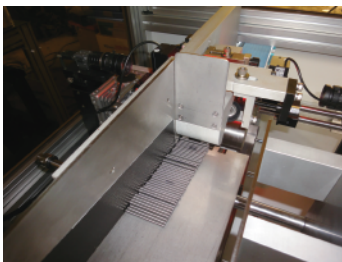


入料倉Unmachined Parts Hopper

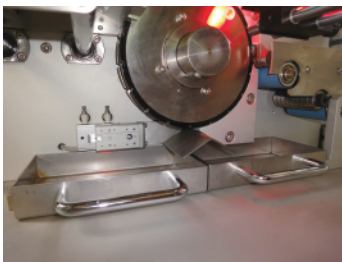

NG品排出 (單面/雙面缺角)
Conveyor Discharge No Good Product
(Single/Double sides of Missing Corner)

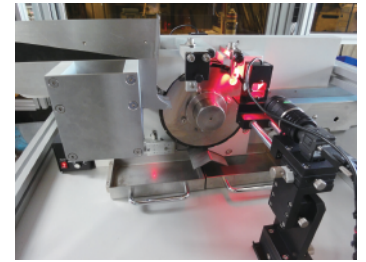


影像擷取 前端面
Video Capture (Front Face)

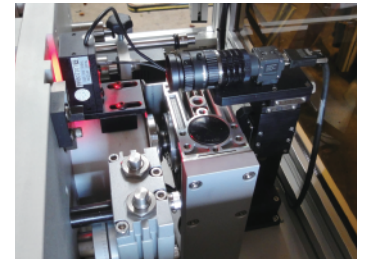

影像擷取 後端面
Image Capture (Back Face)



OK品，輸送帶送出
Conveyor Output Good Product

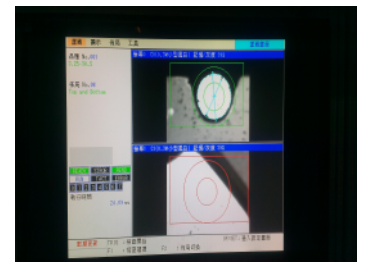

影像擷取顯示與判定
Image Capture (Display and

品名/型號	
外型尺寸	W700×D700×H1750 mm
重量	120Kg
動力需求	AC220/380V 50/60Hz
檢測速度	1~2sec/pc

Technical data	
Outside dimensions	W700×D700×H1750 mm
Weight	120Kg
Power supply	AC220/380V 50/60Hz
Detection rate	1~2sec/pc